



VO-43-I



Insulated Articulated Overcenter Aerial Lift

DEMAND BETTER

Ground & Service Body Access from Platform



240° Upper Boom Articulation

Platform Tilt for Easy Cleaning



140° Lower Boom Articulation

Cylinder Rods Fully Retracted in Stowed Position



- Working Height: 47' 10" (14.6m)
- Horizontal Reach, Overcenter: 34' (10.4m)
- Horizontal Reach, Non-Overcenter: 33' 1" (10.1m)
- Maximum Platform Capacity: 440 lbs (199kg)



For more information about the VO-43-I or any of the other outstanding VERSALIFT machines, contact your authorized VERSALIFT Distributor or call 1.800.825.1085.



VO-43-I

Insulated Articulated Overcenter Aerial Lift

GENERAL SPECIFICATIONS (Based on 40 in. (1.02m) Frame Height)

	VO-43-I
Horizontal Reach Overcenter	34 ft. (10.4 m)
Horizontal Reach Non-Overcenter	33 ft. 1 in. (10.1 m)
Standard Platform Capacity	350 lbs. (160 kg)
Maximum Platform Capacity	400 lbs. (199 kg)
Lower Boom Lift Eye Capacity	1,500 lbs. (680 kg)

With Standard Pedestal

Height to Bottom of Platform	42 ft. 10 in. (13 m)
Working Height	47 ft. 10 in. (14.6 m)
Stowed Travel Height	10 ft. 3 in. (3.1 m)
Weight of Lift	3,450 lbs. (1565 kg)


Hydraulic System

Operating Pressure	2,500 PSI (175 kg/cm ²)
Flow Rate	6 GPM (23 lpm)
Filtration	10 micron return 100 mesh suction
System Type	Open center
Power Source	PTO pump

- NOTE: 1. Specifications may vary without prior notification.
2. Required GVWR can vary significantly with chassis, lift mounting location, service body, accessories, and desired payload

OPTIONS

- Up to 400 lbs. Platform Capacity
- 24x30 Platform
- Manual Platform Tilt
- Hydraulic Platform Rotation
- Two-Speed Manual Throttle-Control
- Hydraulic Power
- Outriggers or Torsion Bars
- Outrigger/Boom Interlock
- Tool Port Pressure & Flow Control
- Unitrol H.R.

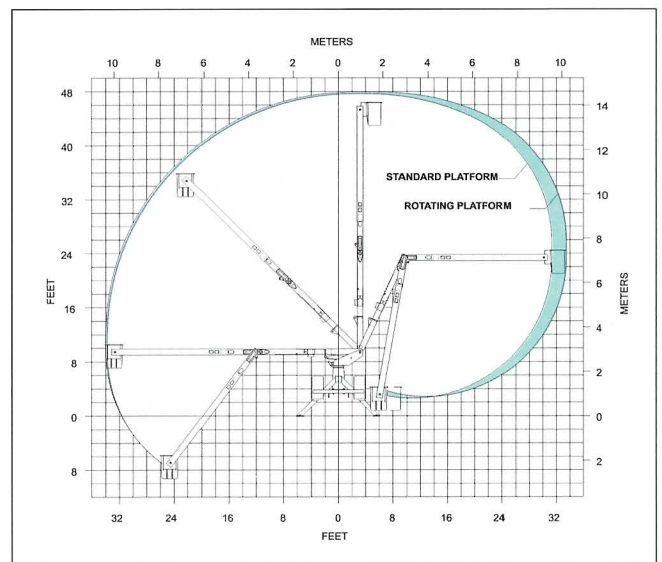


TIME
MANUFACTURING COMPANY
P.O. Box 20368
Waco, TX 76702-0368
254.399.2100
Fax: 254.399.2651
1.800.825.1085
www.timemfg.com