



# VST-39/43/50/55-TN

Articulated/Telescopic Aerial Lift



## DEMAND BETTER

Unitrol Bucket Controls



Hydraulic  
tool outlets

180° Hydraulic  
Platform Rotation



Optional Platform  
Mounted jib  
and winch



- Working Height: Up to 59' 7"
- Side Reach: Up to 30' 2"
- Platform Capacity: 500 lbs.



For more information about the VST-39/43/50/55-TN or any of the other outstanding VERSALIFT machines, contact your authorized VERSALIFT Distributor or call 1.800.825.1085.



# VST-39/43/50/55-TN

## Articulated/Telescopic Aerial Lift

### GENERAL SPECIFICATIONS

Based on 40" frame

	VST-39-TN	VST-43-TN	VST-50-TN	VST-55-TN
Horizontal reach	26'-0" (7.9 m)	30'-0" (9.1 m)	30'-7" (9.3 m)	30'-2" (9.2 m)
Max platform capacity	500 lbs (227 kg)			
Max jib capacity	200 lbs (90 kg)			

### HEIGHTS WITH STANDARD PEDESTAL

Bottom of platform	39'-5" (12.0 m)	43'-5" (13.2 m)	49' (15.1 m)	53'-7" (16.3 m)
Working height	44'-5" (13.5 m)	48'-5" (14.8 m)	54' (16.6 m)	59'-7" (17.9 m)
Stowed travel height	10'-6" (3.2 m)	10'-6" (3.2 m)	10'-6" (3.2 m)	10'-6" (3.2 m)

### BOOM ACTION

Outer/Inner boom articulation	-25 to +85°	-25 to +85°	-25 to +85°	-25 to +85°
Inner boom extension	79" (2.0 m)	103" (2.6 m)	103" (2.6 m)	103" (2.6 m)
Lower boom articulation	87°	87°	84°	84°
Rotation	360°	360°	360°	360°

### VEHICLE REQUIREMENTS


Cab to axle (minimum)	60" (1.5 m)	84" (2.14 m)	84" (2.14 m)	102" (2.6 m)
GVWR	17,500 lbs (7,940 kg)	17,500 lbs (7,940 kg)	17,500 lbs (7,940 kg)	21,000 lbs (9,545 kg)

NOTE:

1. Specifications may vary without prior notification.
2. Required GVWR can vary significantly with chassis, lift mounting location, service body, accessories, and desired payload.

### OPTIONS

- Auxillary Outriggers
- Second Set of Hydraulic Tool Outlets
- Lifting Eye
- Emergency Power
- Two-Speed Manual Throttle Control
- Material Handling Jib & Winch
- Various Pedestal Heights
- 120 Volt Outlet @ Platform
- Unitrol H.R.

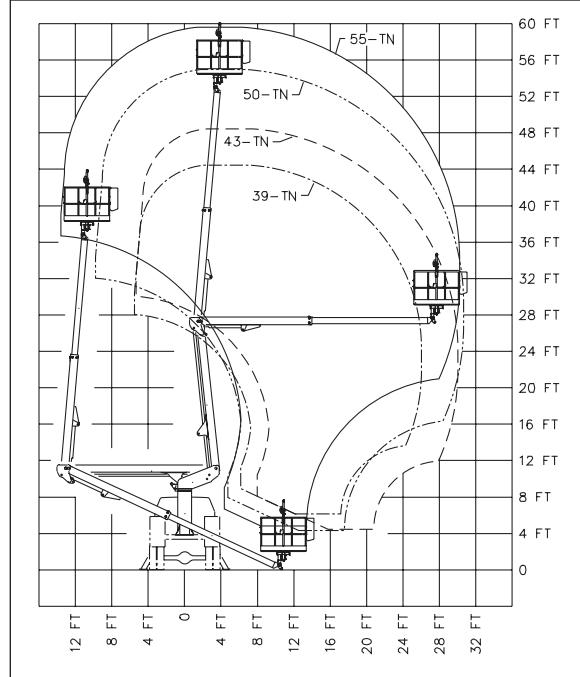

**TIME**  
MANUFACTURING COMPANY  
P.O. Box 20368  
Waco, TX 76702-0368  
254.399.2100  
Fax: 254.399.2651  
1.800.825.1085  
[www.timemfg.com](http://www.timemfg.com)

