



VersaTrack

Articulated Telescopic Aerial Lift

DEMAND BETTER.

STANDARD FEATURES


- Maximum working height: 42' (12.8m)
- Maximum horizontal reach: 28' (8.5m)
- Maximum platform capacity: 300 lbs. (136kg)
- 180° Rotating Platform
- Insulated to 46 KV category C
- Full 360° work zone stability
- Radio Remote Drive
- Fiberglass electroguard provides full insulation in all boom positions (to ANSI 92.2 Category C)

DIMENSIONS

- Overall, length including aerial is 16'8" (5.1m)
- Length with outriggers fully extended is 14'4" (4.3m)
- Overall, width without tracks extended is 35" (.89m)
- Overall, height including aerial is 7'2" (2.1m)

OPTIONS

- LowerTool Circuit
- Outrigger Interlocks

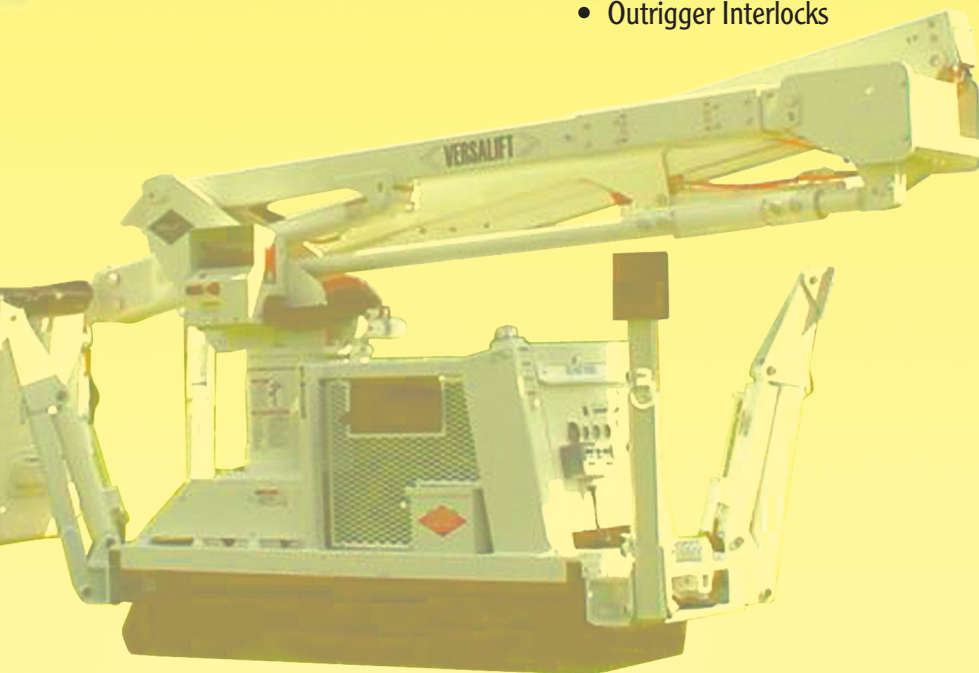

For more information about the VersaTrack or our entire line of outstanding Versalift aerials, contact your authorized Versalift Distributor or call 1.800.825.1085.



VersaTrack

Articulated Telescopic Aerial Lift

GENERAL SPECIFICATIONS

Horizontal Reach	27'9" (8.5m)
Standard Platform Capacity	300 lbs. (136kg)
Electrical Rating	46kV

WITH STANDARD REVERSE MOUNT PEDESTAL

Height to Bottom of Platform	37'4" (11.2m)
Working Height	42' (1.07m)

HYDRAULIC SYSTEM

Operating Pressure	2250 PSI (158kg/cm)
Flow Rate	3 GPM (7.5 lpm)
Filtration	10 micron return, 100 mesh suction
System Type	Open Center

BOOM ACTION

Inner Boom	116" (2.9m) extension
Outer Boom	-14° to +74°
Lower Boom	-5° to vertical

INSULATION GAP

Upper Boom Fully Retracted	42" (1.07m)
Lower Boom Insert (optional)	12" (0.3m)

NOTE: Specifications may vary without prior notification.



P.O. Box 20368
Waco, TX 76702-0368
254.399.2100
Fax: 254.399.2651
1.800.825.1085
www.timemfg.com